



PLCC-Extractor

The safe extractor tool for all PLCC components from 20 to 84 pin. It is universally suitable for PLCC sockets from all manufacturers.

Compact


The supports are set to the external contours of the socket.

Durable

The two gripping hooks are made from special steel which has been hardened and the edges ground to an acute edge. Components can be safely extracted even from SMD sockets.

Safe against Short-Circuiting

Because the support pivots of the withdrawal hooks are separate. Typical surface resistance is $10^5 \Omega$.

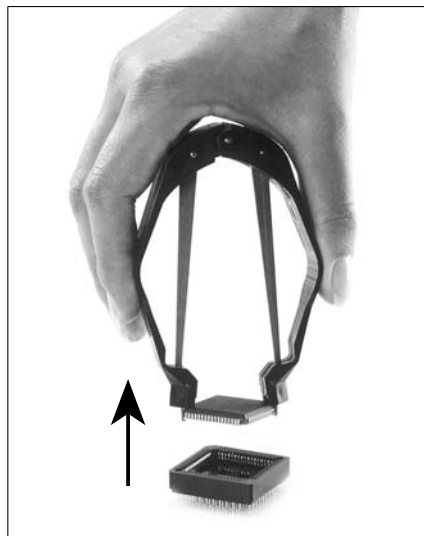

Description	Order No.
PLCC-Extractor	8920001

Easy to Use

Insert each hook into the cut-cuts in the PLCC mounting.

Squeeze the grips together and the component can be gently extracted.

