


# TP6/S

cutting bending  
forming machine  
for axial  
components  
surface mounting




PRODUCTION = TAPED 50.000 p/h  
LOOSE 5.000 p/h



STANDARD VERSION  
(Cod. 25.OL01)

LENGTH = 23 cm  
WIDTH = 18 cm  
HEIGHT = 21 cm  
PACKING = 39x25x26 cm  
VOLUME = 0,025 m<sup>3</sup>  
MACHINE WEIGHT = 5 kg  
GROSS WEIGHT = 6 kg



	MM		INCH	
	min	max	min	max
<b>P</b>	12	47	.472	1.850
<b>C</b>	1,5	10	.059	.393
<b>L</b>		40		1.574
<b>D</b>	0,4	16	.015	.629
<b>d*</b>	0,6 fix		.023 fix	
<b>B*</b>	2 fix		.078 fix	
<b>h*</b>	2,5 fix		.098 fix	


\*= quote to be specified upon order



TP6/S with Reel Holder BR6



TP6/S with MOT98 Motor and CS10 Feeder

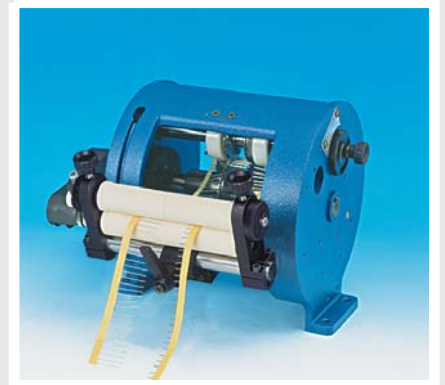

TP6/S with Tape Ejector TNS

The model TP6/S is designed for cutting and bending taped axial components for surface mount. This is a special machine and it is necessary to provide OLAMEF with all the dimensions when ordering. The CS10 loose component feeder is an accessory that attaches to the TP6/S to handle loose parts. Its assembly to the machine is very quick and easy. The Motor drive unit MOT98 driving with foot pedal also, and adjustable speed will make the operation automatic and will increase the production with both taped and loose components. When working with components on tape we suggest the use of the BR6 reel holder. The TNS is an accessory that helps with the ejection of the waste tape.