



TP6-EC OLAMEF

cutting bending machine for axial components

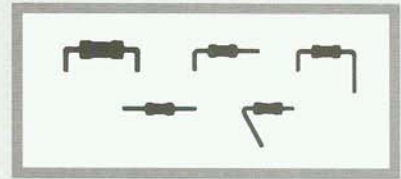

LENGTH = cm 23
 WIDTH = cm 19
 HEIGHT = cm 20
 PACKING = cm 39x25x26
 VOLUME = m³ 0,025
 MACHINE WEIGHT = KG.5
 GROSS WEIGHT = KG.6

TP6/1 - EC
 STANDARD
 VERSION
 (Cod.23.OL01)




The machine model TP6-EC is designed for cutting and bending taped axial components with lead diameter from 0,4 to 1,3 mm (.015 to .051 inch). The desired operation is adjusted in a quick and precise way. The high quality and reliability of this machine ensure the best operation for a very long time. Maintenance is mainly performed by cleaning the discs.

	MM		INCH	
	min	max	min	max
P	6,5	60	.255	2.362
B	5	13	.196	.511
c	1,2		.047	
L		50		1.968
d	0,4	1,3	.015	.051
D	0,4	16	.015	.629


TP6/6 -EC REDUCED
 BENDING-REDUCED CUT
 VARIABLE PITCH
 (Cod.23.OL06)

	MM		INCH	
	min	max	min	max
P	5,08	60	.2	2.362
B	4	13	.157	.511
c	0,8		.031	
L		50		1.968
d	0,4	0,8	.015	.031
D	0,4	10	.015	.039




TP6/7 - EC REDUCED
 BENDING-REDUCED CUT
 FIX PITCH
 (Cod.23.OL07)

	MM		INCH	
	min	max	min	max
P*	5,08	15	.2	.590
B	4	10	.157	.393
c	0,5		.019	
L*		13,5		.531
d	0,4	0,6	.015	.023
D	0,4	4	.015	.157




TP6/4 - EC EXTRA
 REINFORCED BENDING
 (Cod.23.OL04)

	MM		INCH	
	min	max	min	max
P	10,16	60	.4	2.362
B	5	13	.196	.511
c	2,4		.094	
L		50		1.968
d	0,6	1,4	.023	.055
D	0,6	16	.023	.629



TP6/5 - EC REDUCED CUT
 (Cod.23.OL05)

	MM		INCH	
	min	max	min	max
P	6,5	60	.255	2.362
B	4	13	.157	.511
c	1,2		.047	
L		50		1.968
d	0,4	1	.015	.039
D	0,4	16	.015	.629



** To be specified upon order