


TP6/V-EC OLAMEF

cutting bending machine for axial components vertical mounting

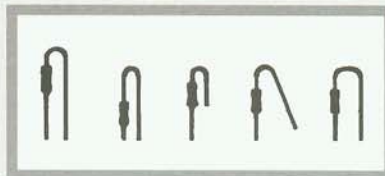

LENGTH = cm 23
 WIDTH = cm 19
 HEIGHT = cm 22
 PACKING = cm 39x25x26
 VOLUME = m³ 0,025
 MACHINE WEIGHT = KG.5
 GROSS WEIGHT = KG.6


The machine model TP6/V-EC is designed for cutting and bending taped axial components for vertical mounting. It is manufactured in two versions: the first one for components with lead diameter from 0.5 to 0.8 mm (.019 to .031") and the second for lead diameter from 0.8 to 1.3 mm (.031 to .051"). The bending pitch, which is determined by the bending cam supplied, can be changed by replacing the cam with one of different thickness. To be specified upon order **

LEAD DIAMETER 0,5 TO 0,8 mm (.019 to .031 inch)


TP6/V/1-EC STANDARD VERSION PITCH 2.54 mm (.10") (Cod 81.OL01)

LEAD DIAMETER 0,8 TO 1,3 mm (.031 to .051 inch)

TP6/V/21-EC PITCH 3.8 mm (.15") (Cod.81.OL21)



	MM		INCH	
	min	max	min	max
A	2	6	.078	.236
L		15		.590
F	3	8	.118	.314
D	0,5	3	.019	.118
d	0,5	0,8	.019	.031
P	**2,54 fix		**.1 fix	



	MM		INCH	
	min	max	min	max
A	4	9	.157	.354
L		15		.590
F	3	8	.118	.314
D	0,8	5	.031	.196
d	0,8	1,3	.031	.051
P	**3,8 fix		**.15 fix	