


# M3

Female – Female

Polyamide Max Temp 110°C



Dimensions in mm

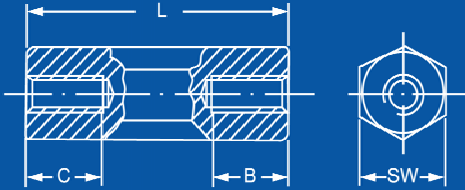

L Length	Brass Nickel Plated			Steel Zinc Plated			Polyamide					
	Part #	C	B	SW	Part #	C	B	SW	Part #	C	B	SW
5	10.3060.05	2.5	2.5	5	10.3061.05	2.5	2.5	5.5	10.3062.05	2.5	2.5	6
6	10.3060.06	3	3	5					10.3062.06	3	3	6
7	10.3060.07	3.5	3.5	5	10.3061.07	3.5	3.5	6	10.3062.07	3.5	3.5	6
8	10.3060.08	4	4	5	10.3061.08	4	4	5.5	10.3062.08	4	4	6
9									10.3062.09	4.5	4.5	6
10	10.3060.10	5	5	5	10.3061.10	5	5	5.5	10.3062.10	5	5	6
11	10.3060.11	5.5	5.5	5	10.3061.11	5.5	5.5	6	10.3062.11	5.5	5.5	6
12	10.3060.12	6	6	5	10.3061.12	6	6	5.5	10.3062.12	6	6	6
13	10.3060.13	6.5	6.5	5	10.3061.13	6.5	6.5	6	10.3062.13	6.5	6.5	6
14	10.3060.14	7	7	5	10.3061.14	7	7	6	10.3062.14	7	7	6
15	10.3060.15	7.5	7.5	5	10.3061.15	7.5	7.5	5.5	10.3062.15	7.5	7.5	6
16	10.3060.16	8	8	5	10.3061.16	8	8	6	10.3062.16	8	8	6
17	10.3060.17	8.5	8.5	5	10.3061.17	8.5	8.5	6	10.3062.17	8.5	8.5	6
18	10.3060.18	9	9	5	10.3061.18	9	9	6	10.3062.18	9	9	6
19					10.3061.19	9.5	9.5	5.5	10.3062.19	9.5	9.5	6
20	10.3060.20	10	10	5	10.3061.20	6	6	6	10.3062.20	10	10	6
21									10.3062.21	10	10	6
22					10.3061.22	10	10	5.5	10.3062.22	10	10	6
23									10.3062.23	10	10	6
24									10.3062.24	10	10	6
25	10.3060.25	10	10	5	10.3061.25	10	10	5.5	10.3062.25	10	10	6
26									10.3062.26	10	10	6
27	10.3060.27	10	10	5	10.3061.27	6	6	6	10.3062.27	10	10	6
28					10.3061.28	6	6	6	10.3062.28	10	10	6
29									10.3062.29	10	10	6
30	10.3060.30	10	10	5	10.3061.30	10	10	5.5	10.3062.30	10	10	6
31									10.3062.31	10	10	6
32	10.3060.32	10	10		10.3061.32	10	10	5.5	10.3062.32	10	10	6
33	10.3060.33	10	10	5					10.3062.33	10	10	6
34									10.3062.34	10	10	6
35	10.3060.35	10	10	5	10.3061.35	10	10	5.5	10.3062.35	10	10	6
36					10.3061.36				10.3062.36	10	10	6
37	10.3060.37	10	10	5	10.3061.37	6	6	6	10.3062.37	10	10	6
38					10.3061.38	6	6	6	10.3062.38	10	10	6
39									10.3062.39	10	10	6
40	10.3060.40	10	10	5	10.3061.40	10	10	5.5	10.3062.40	10	10	6
42					10.3061.42	6	6	6	10.3062.42	10	10	6
44									10.3062.44	10	10	6
45	10.3060.45	10	10	5	10.3061.45	10	10	5.5	10.3062.45	10	10	6
46									10.3062.46	10	10	6
48									10.3062.48	10	10	6


# M3

Female - Female

Polyamide Max Temp 110°C



Dimensions in mm

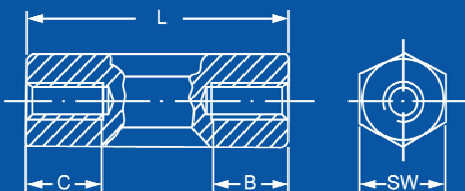

L Length	Brass Nickel Plated				Steel Zinc Plated				Polyamide			
	Part #	C	B	SW	Part #	C	B	SW	Part #	C	B	SW
50	10.3060.50	10	10	5	10.3061.50	10	10	5.5	10.3062.50	10	10	6
55	10.3060.55	10	10	5	10.3061.55	10	10	5.5	10.3062.55	10	10	6
60	10.3060.60	10	10	5	10.3061.60	10	10	5.5	10.3062.60	10	10	6
65					10.3061.65	10	10	5.5	10.3062.65	10	10	6
70					10.3061.70	10	10	5.5				

Dimensional changes or custom parts made to order. Call us for a quote